


HOTMELT ADHESIVE COATING MACHINE

PRECISE COATING. CONSISTENT PERFORMANCE.

ECOCOAT

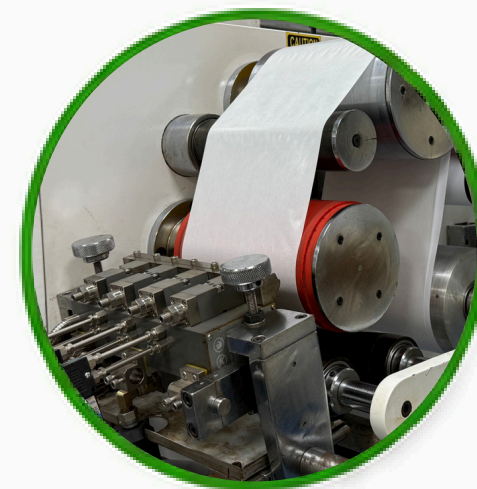

COATING STATION

Uniform adhesive coating for various applications.



EDGE GUIDING SYSTEM

High precision edge guiding for accurate material alignment.



CONTROL PANEL

User-friendly HMI with speed, length & temperature controls.



UNWIND / REWIND SYSTEM

Air expanding shafts with autofill for easy roll handling.

APPLICATION AREAS

Powered by **MeltX**TM




LABELS
(SELF-ADHESIVE)



TAPES
(INDUSTRIAL & PACKAGING)



MEDICAL
(SURGICAL DRESSING & TAPES)



SPECIALTY
ADHESIVE APPLICATIONS

KEY TECHNICAL FEATURES



FULL INTEGRATION

Slot-die & delivery system for smooth and continuous coating.



FLEXIBLE COATING

Stripe or full width coating options available.



QUICK RELEASE ROLL

Easy loading/unloading of coating roll for minimal downtime.



PNEUMATIC TENSION CONTROL

Consistent web tension for superior coating quality.



EDGE GUIDING SYSTEM

Automatic alignment for precise and waste-free production.



AIR EXPANDING SHAFTS WITH AUTOFILL

Efficient unwind/rewind operation with secure roll holding.

BENEFITS



High precision coating for consistent results



Reduced material waste and rework



Easy operation and maintenance



Higher productivity and reliability

CONTACT US



+91-9560096996



www.abprintpack.in




info@abprintpack.in

AB PRINT PACK | ADVANCED COATING SOLUTIONS FOR A BETTER TOMORROW

TECHNICAL SPECIFICATIONS

PRECISE COATING. CONSISTENT PERFORMANCE.

ECOCOAT

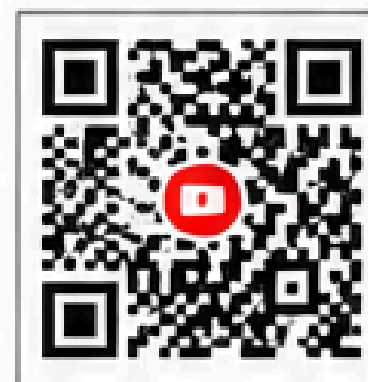

SCAN FOR
MACHINE
WORKING VIDEO

MODELS AVAILABLE

AB-HMC200

AB-HMC300

SPECIFICATION	ECOCOAT (AB-HMC200)	ECOCOAT (AB-HMC300)
 Construction	Cantilever	Cantilever
 Max Coat Width	175 mm	250 mm
 Coating Method	Slot Die	Slot Die
 Substrate	Paper / Film / Fabric	Paper / Film / Fabric
 Web Guide	Edge Guiding System on Both Unwind	Edge Guiding System on Both Unwind
 Tension Control	Pneumatic tension control system	Pneumatic tension control system
 Max Speed	50 Mtr/min	50 Mtr/min
 Core Size	76 mm (3")	76 mm (3")
 Melter Options	7kg / 10kg / 20kg (As Required)	7kg / 10kg / 20kg (As Required)
 Production Speed	0 – 50 MPM (Depends upon Coating Width GSM)	0 – 50 MPM (Depends upon Coating Width GSM)
 Unwind & Rewind Shaft	Air Expanding Shaft with Autofill	Air Expanding Shaft with Autofill
 Drive	3 Hp AC Drive (Geared Motor)	3 Hp AC Drive (Geared Motor)
 Water Chiller	1 no.	1 no.
 Touch Screen Control	Standard	Standard

KEY ADVANTAGES



Slot Die
Technology



Pneumatic
Tension Control



Edge Guiding
System



Air Expanding
Shaft



50 Mtr/min
Max Speed



Touch Screen
HMI



AB PrintPack Machinery

Leading Edge Innovation

 **Regd Add:-** 14/7 Chintamani Metal Udyog Complex,
Sector - 31, Faridabad, Haryana - 121003 (INDIA)

 **Email :-** info@abprintpack.in  **Ph :-** +91-9560096996



WATCH US ON

You Tube

/abprintpack